




**Datasheet**

Robot-AGV Specification

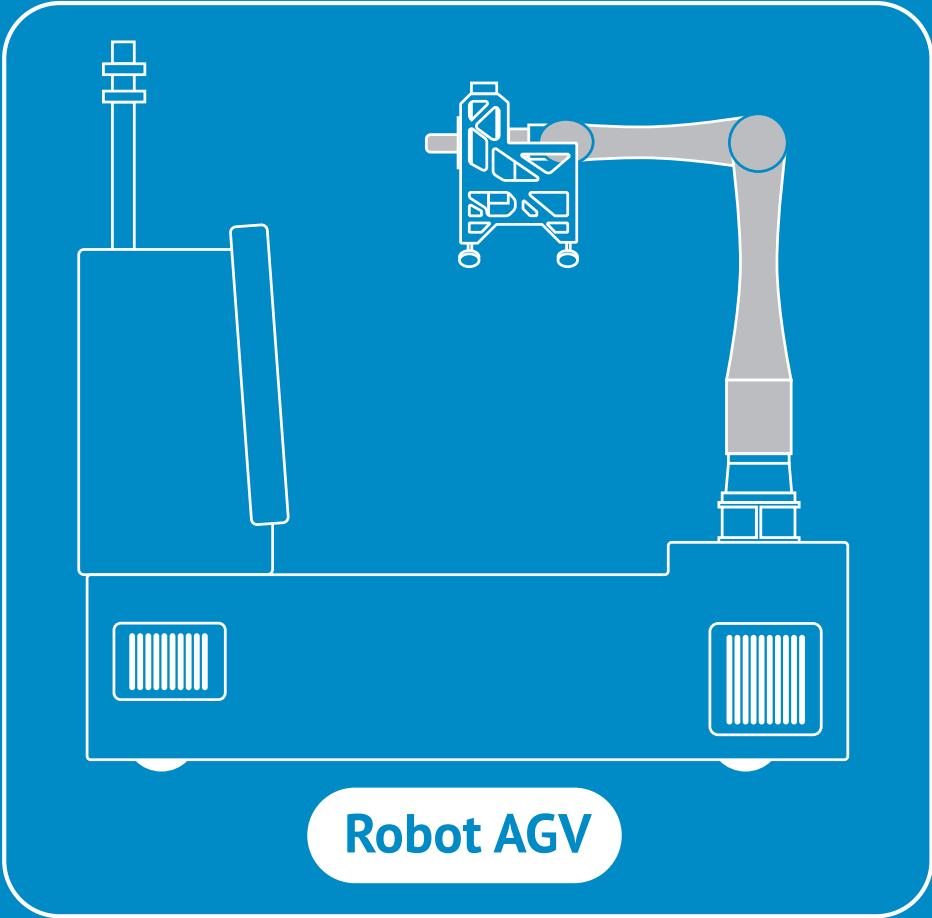

## Robot AGV - Design Features

- Compact design for narrow creel or winder aisles
- Production rates of up to 250 bobbins/Hr
- 1200mm x 1000mm Pallets as standard
- Max. travel speed 1.7m/sec
- Max. Robot Payload 200Kg
- Max. Reach 2000mm
- Max. Pallet weight 2000Kg
- Quick charge – less than 10 minutes from 0-100%
- Opportunity charge
- Laser scanner for navigation
- Safety scanners allow close collaboration with operators
- System can communicate and or be linked with:-
  - Warehouse Management Systems
  - Winder lines
  - Labelling systems
  - Weighing systems
  - Barcode or RFID systems

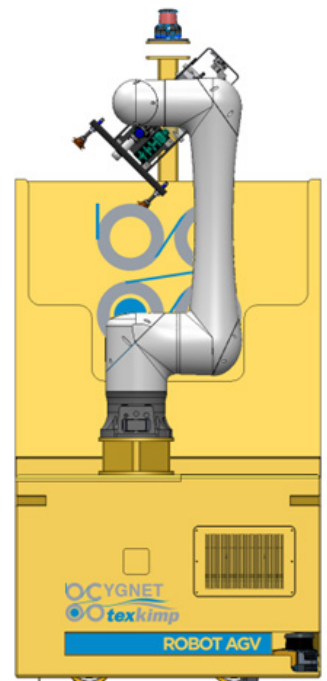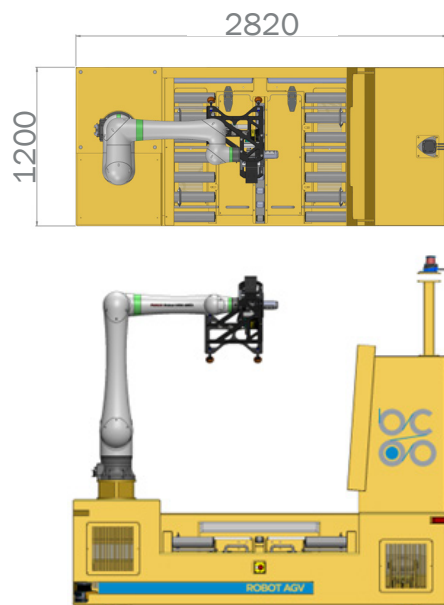

*A leading global provider of fibre handling and converting technology*

### Cygnnet Texkimp Limited

Swan House,  
Kimpton Drive off Wincham Lane,  
Wincham, Northwich,  
Cheshire, CW9 6GG,  
United Kingdom

**Tel:** +44 (0)1606 338 748

**Email:** info@cygnet-texkimp.com